



New Zealand

H3 NZ Ltd

Wooden slat acoustic panel





Our product

Product Series

Technical Wood Veneer




Natural Wood Veneer



Forsted Veneer



Three Sides Covered



Accessories

Eindlat



Material

Combine the acoustic felt, Eco friendly MDF & wood veneer:

PET:1350g/m²; MDF:800KG/m³


Size: 2400*600*22mm

3000*600*22mm

600*600*22mm

customize 2400~3000mm*600/400mm*22mm

Slat-gap: 25-15, 27-13, 27-10mm

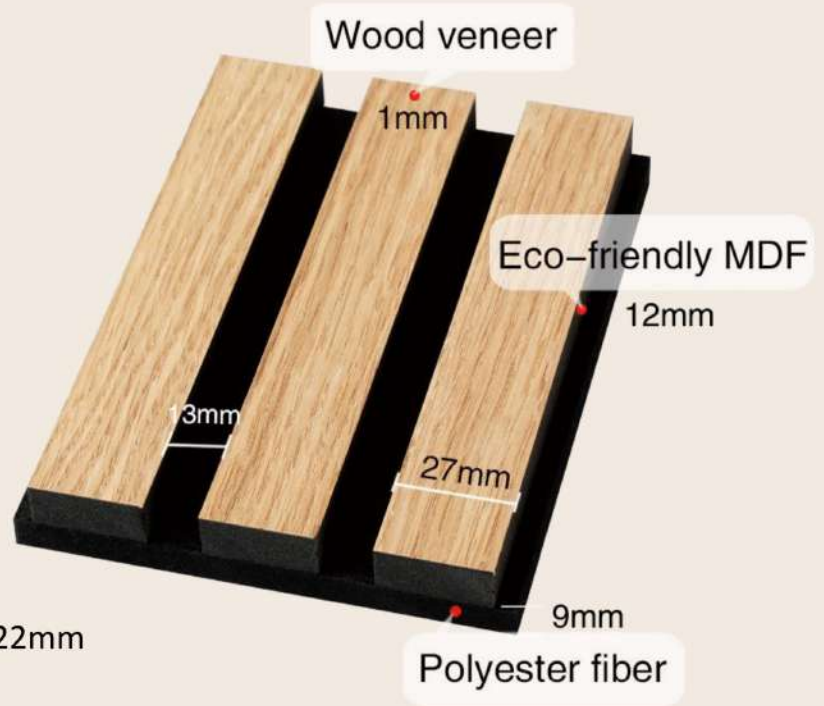

Specifications

Material	MDF board & PET fiber
Finish	Paper or wood veneer
Length	2400/3000 mm
Width	400/600 mm
Thickness	22 mm
Eco-level	(MDF board) CARB P2
Flame retardant (felt)	Can achieve EN 13501-1:2018 CLASS BASTM E84 CLASS A
NRC	Sound absorption coefficient NRC=0.8
Clean	Clean with a vacuum cleaner or a dry cloth, not with water
Installation	Screws or mounting glue

Material

Combine the acoustic felt, Eco friendly MDF & wood veneer:
 PET:1350g/m²; MDF:800KG/m³



Size: 2400*600*22mm
 3000*600*22mm
 600*600*22mm

customize 2400~3000mm*600/400mm*22mm
 Slat-gap: 25-15, 27-13, 27-10mm





COLOUR Polyester fiber

SY-01	SY-05	SY-09	SY-13	SY-17	SY-21	SY-25	SY-29	SY-33	SY-37	SY-41	SY-45
SY-02	SY-06	SY-10	SY-14	SY-18	SY-22	SY-26	SY-30	SY-34	SY-38	SY-42	SY-46
SY-03	SY-07	SY-11	SY-15	SY-19	SY-23	SY-27	SY-31	SY-35	SY-39	SY-43	SY-47
SY-04	SY-08	SY-12	SY-16	SY-20	SY-24	SY-28	SY-32	SY-36	SY-40	SY-44	SY-48

Advantage




- 1** Effective noise reduction
Sound-absorbing felt mitigates noise and reduced unwanted reverberations
- 2** Rich in color and shape
Versatile woodgrain colors and finishes to appeal to any style of home or office
- 3** Flame retardant
The black acoustic felt can achieve B1 grade flameretardancy.

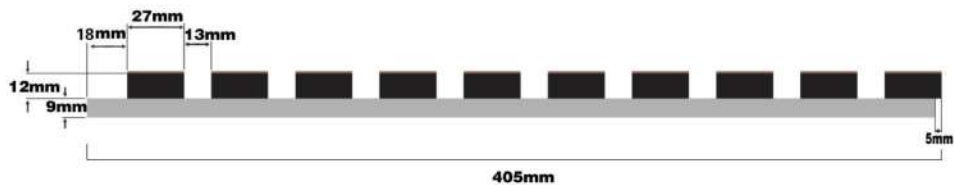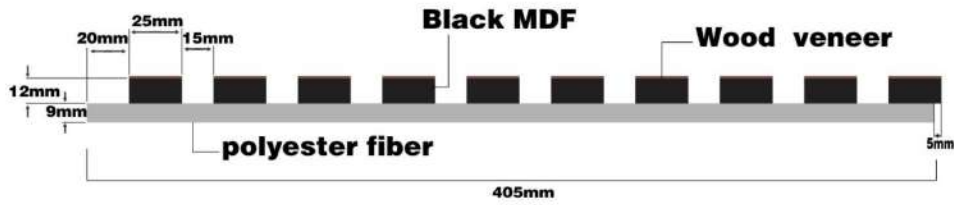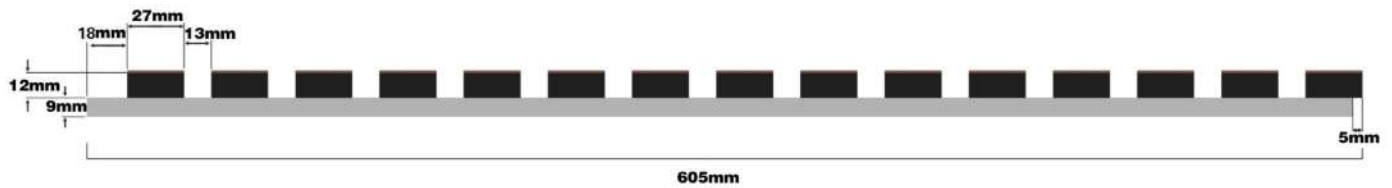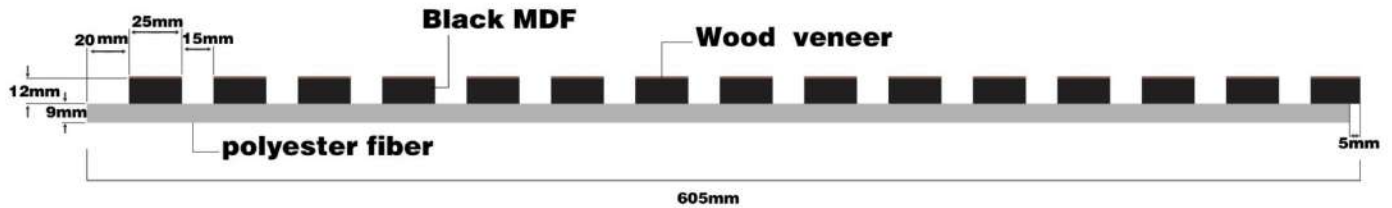



The natural wood veneer is cut from the wood directly, we combine them with MDF together after simple progress. So they make your room natural and look more relaxing. Now we can provide many different colors natural wood veneered panels, they are very popular colors in different countries.

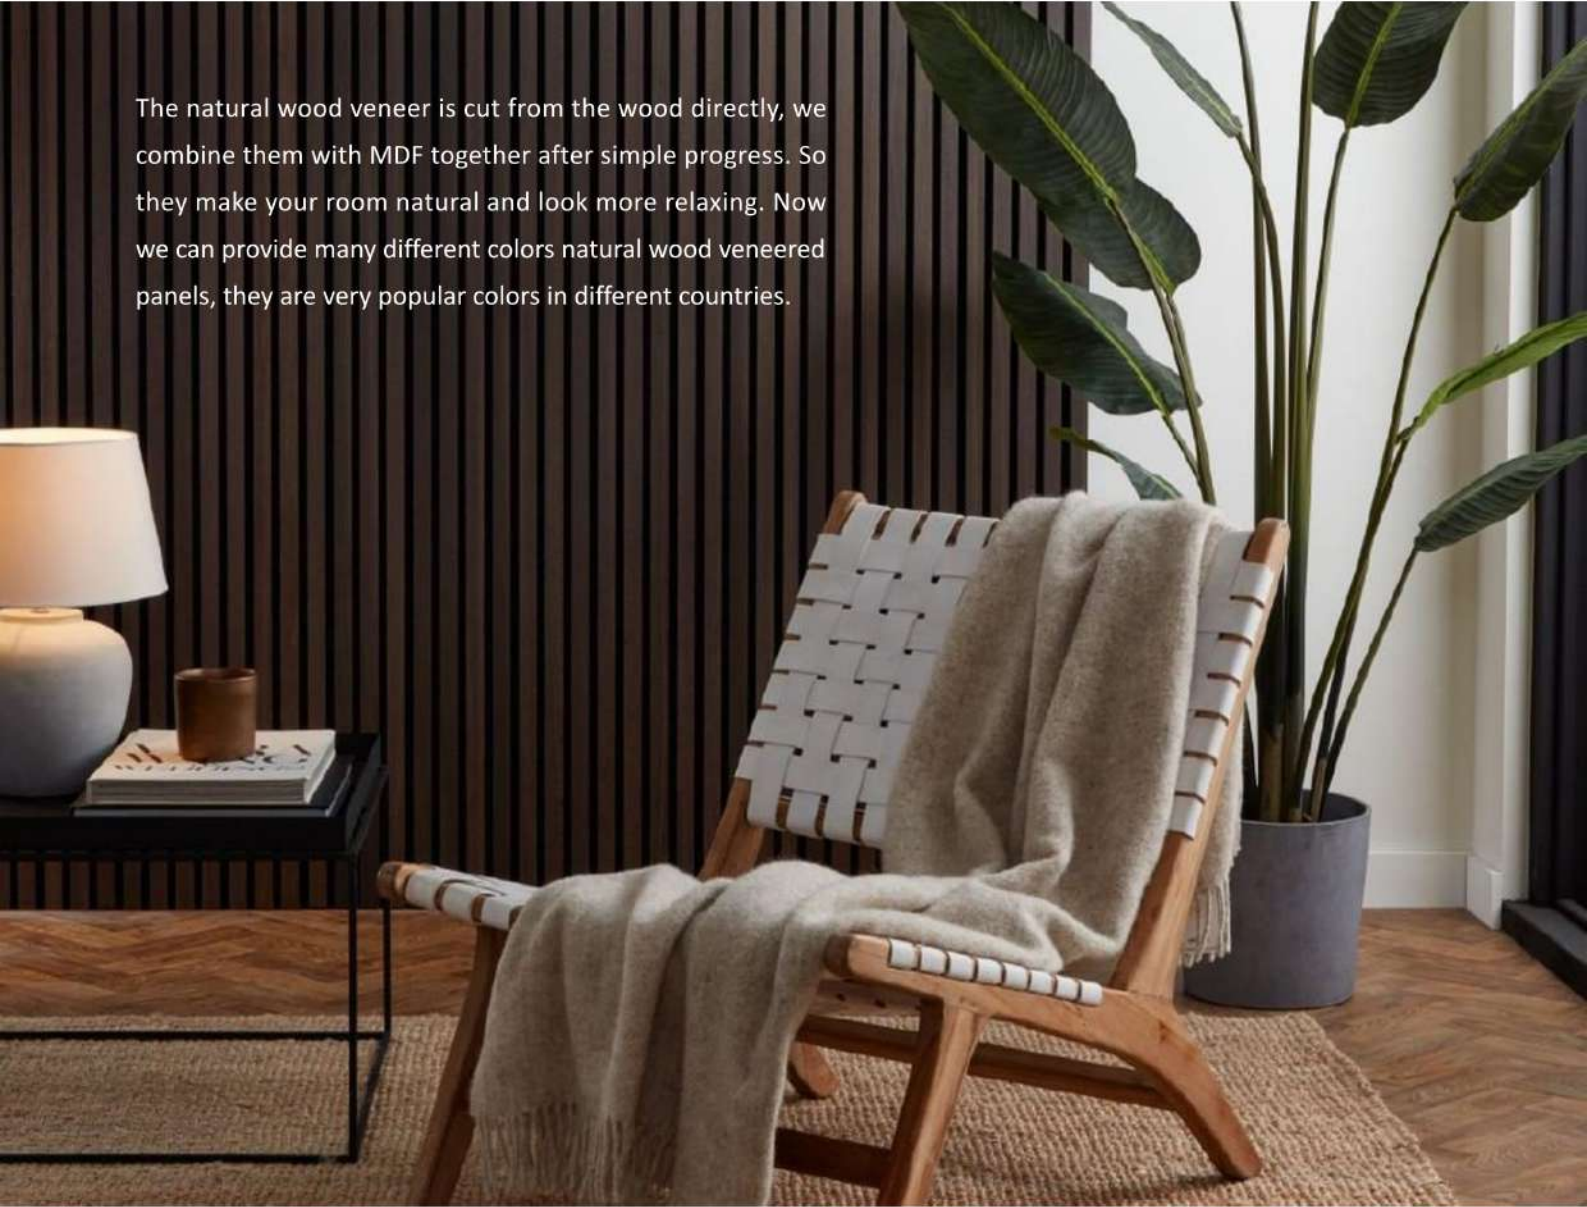

Color Atla

Technical Wood Veneer



White Oak



Walnut



Walnut.JK



Smoke Oak



Grey Oak



W. Oak



Black Oak

Natural Wood Veneer



White Oak



White Oak-G



Ash



Walnut



Oiled oak



Smoke oak




Grey Oak



Black Oak

Frosted finish




Marbling-L12



Grey-L03



Black-L21



Orange-L07



Red-L26



Blue-L31

THREE SIDES COVERED

Technical Wood Veneer



Oak



Walnut

PVC surface



PVC-ZK22



PVC-ZK49




PVC-ZK29



PVC-ZK34

Installation

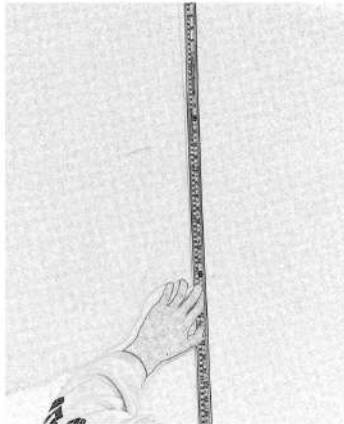


① Measure the installation position



② Measure the wooden slat acoustic panel



③ Cut in fit size

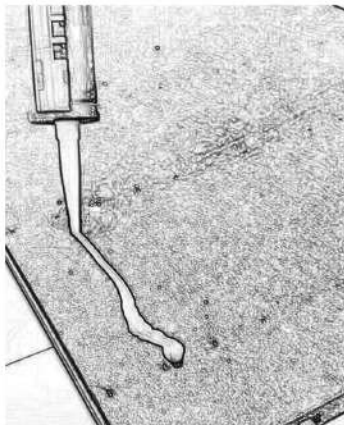

④ Glue the back of panel



⑤ Nail the upper wall



⑥ Finish it

Application



