


HL-200W-ST V2

DIMENSIONS



Optional sensor

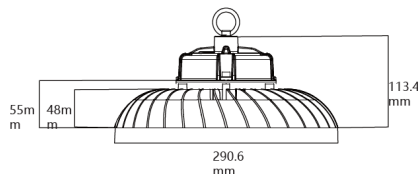

FEATURES

- Die-cast aluminium body
- Black powder-coated finish
- Safety wire included
- IP65 IK08
- 10KA Built-in surge protection
- 150 lm/W efficiency
- Plug-and-play sensor available on request
- Casambi Ready
- Three power settings with DIP switch on the driver
- Power factor: 0.9
- Bridgelux LED chips
- Unique design for improved heat dissipation and reduced dust accumulation
- 0-10V dimming
- LED lifespan: 100000 hours @ L80 B10, Ta 25°C
- Operating temperature (Ta): -30°C to +50°C
- 5 Years Warranty

OPTIONS



U-Bracket



Aluminium Reflector



PC Reflector



Microwave sensor

SPECIFICATIONS

Item No.	Input (V)	IP/IK	Power	Lumen	CRI	Colour Temp	Dimmable	Beam Angle
HL-200W-ST	90-305	IP65 IK08	Selectable 100w 150w 200w	15000lm 22500lm 30000lm	>80Ra	CCT Selectable 4/5/6K	0-10V	120

