


Stadium Light

GC71

DIMENSIONS

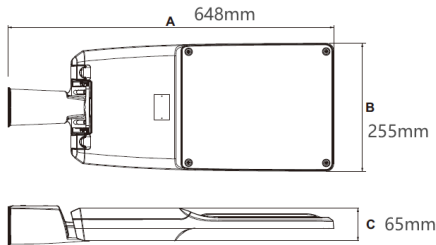

FEATURES

- ADC12 Die-cast aluminium body
- Silver AkzoNobel powder-coated finish
- Light weight 4.7Kg
- IP66 IK09
- 150 lm/W efficiency
- Tool-free access driver box and easy maintenance
- Power factor: 0.95
- Power cut-out switch, the light automatically disconnects when the cover is opened, minimizing the risk of electric shock during maintenance
- LED lifespan: 100000 hours @ L80 B10, Ta 25°C
- Operating temperature (Ta): -25°C to +50°C
- 5 Years Warranty

OPTIONS



NEMA Socket



Photocell




Pole top spigot adaptor



Wall / Top mounted adaptor

OPTICS

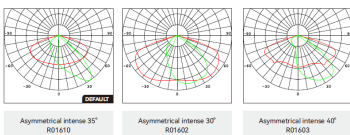

SPECIFICATIONS

Item No.	INPUT (V)	IP/IK	Power	Lumen	CRI	Colour Temp	Control	BEAM ANGLE
H3-GC71	120-277	IP66 IK09	200w	30000lm	>70Ra	3000K/4000K	ON/OFF	See Optics option